



Audi A6/A8

Video Interface Model no. 1225

User Guide



Interface Kit

The interface kit includes the parts listed below. Please check the range of parts you received is complete. If any of the parts is missing, please contact us.



Audi A6/A8 video interface




RGB cable



LVDS In cable



Power cable

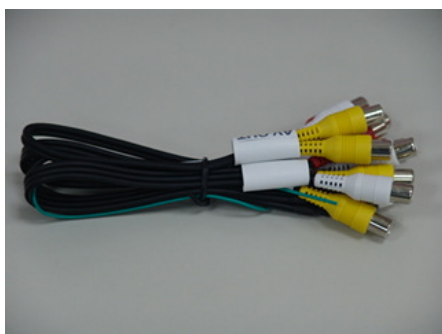


AV IN/OUT



IR extension cord



Remote controller

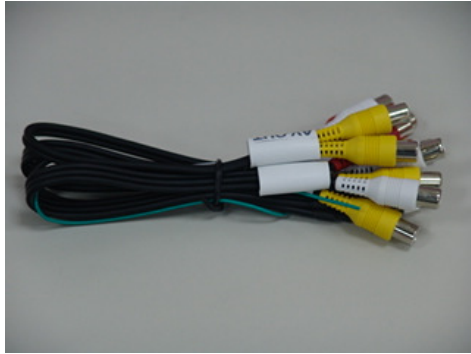

AV IN/OUT

AV1 / AV2 / V3 / AV OUT/ Audio out R/
Audio out L



RGB

Red wire: R Yellow wire: Sync
Green wire: G Black wire: GND
Blue wire: B



Power cable


Black wire: GND Yellow wire: Nav button switch
Red wire: +12V White wire: no use
Blue wire: reverse +12 V



Remote controller

PWR: power
AV: select main menu/RGB/AV1/AV2/AV3
OSD: function key, to set up program and adjust picture
SEL+/SEL-: move between main menu and sub menu
CON+/CON-: select menu and change picture value

Installation steps

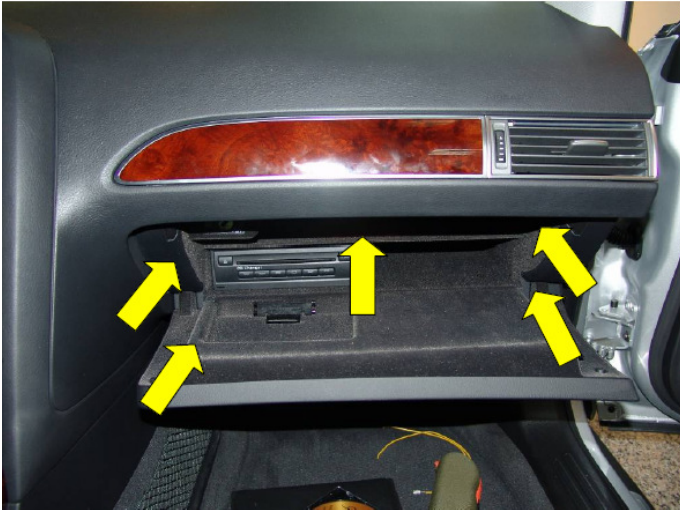


Take off the glove compartment at the passenger side

Arrows show where to loose the bolts





Put the glove compartment on the ground, and then start with the inner installation.



MMI system is in the glove compartment.

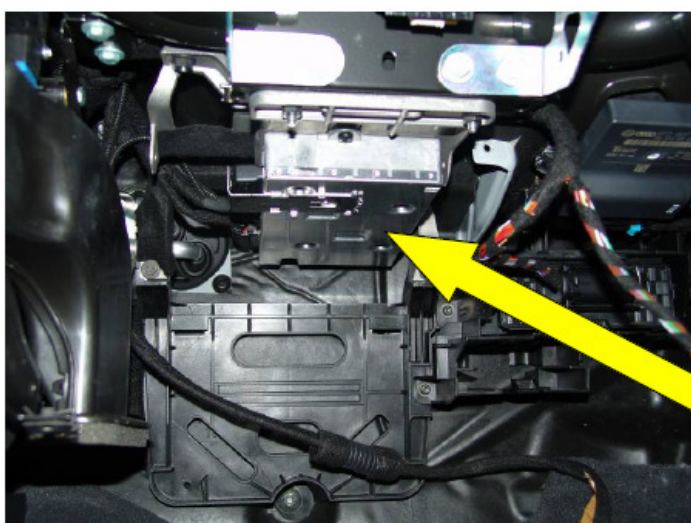


MMI control module

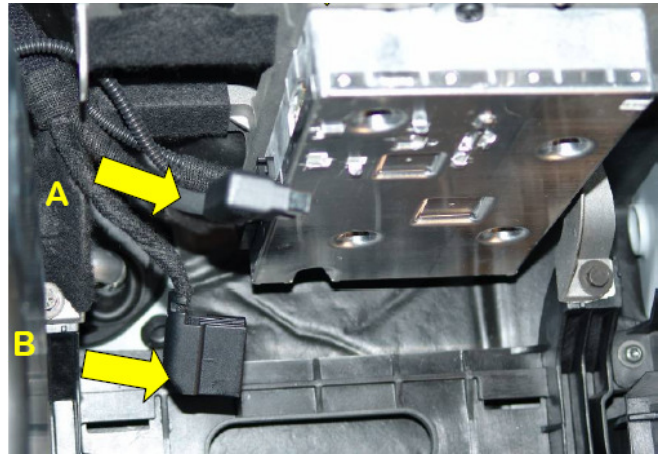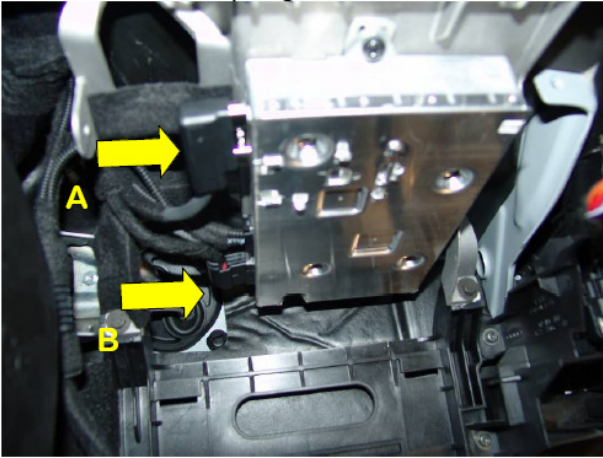

Attention!! Find the A, B connectors on the MMI module. For safety purpose, please unplug the MMI power cable (B connector) first, and then the A connector

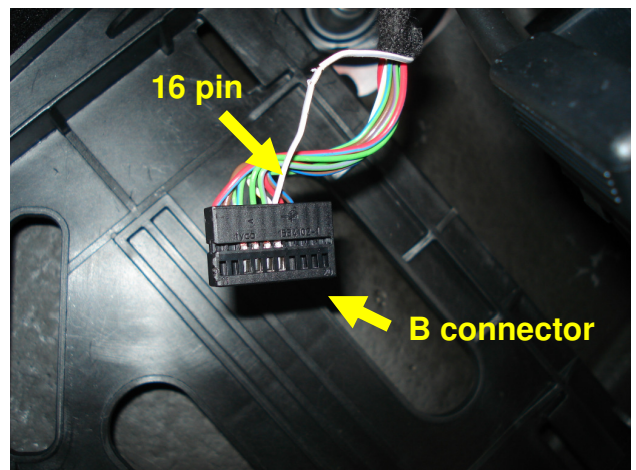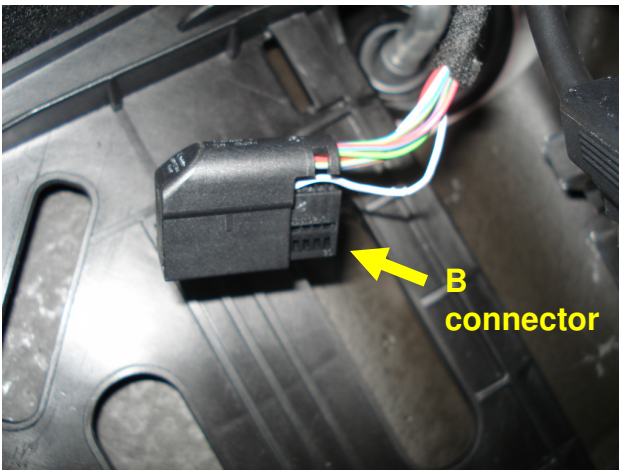


Uncover B connector. Find the 16 pin wire

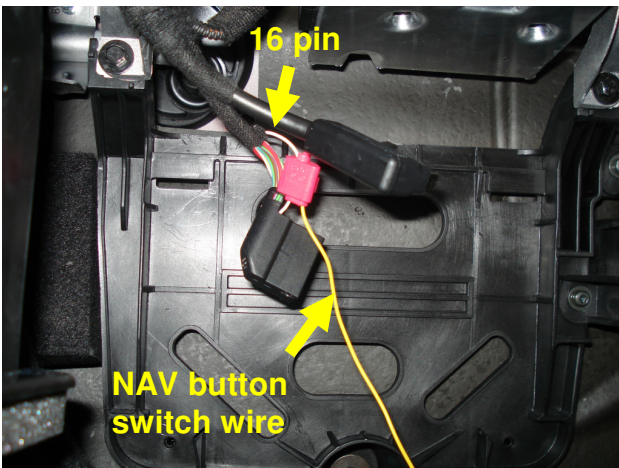


Use NAV button switch wire(yellow wire) from interface to connect with the 16 pin wire.

Note: By connecting these two wires, you will have the function to select AV1~AV3 by factory NAV button

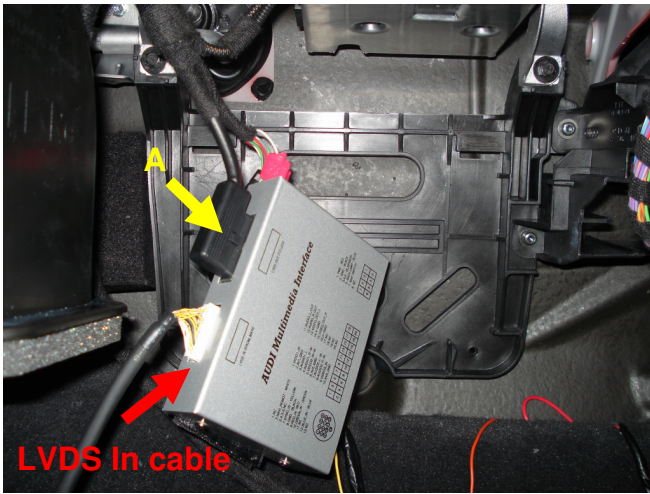

Plug A connector to interface
“LVDS Out”

Use LVDS In cable (comes with
our interface) to connect interface
“LVDS In” and MMI control
module

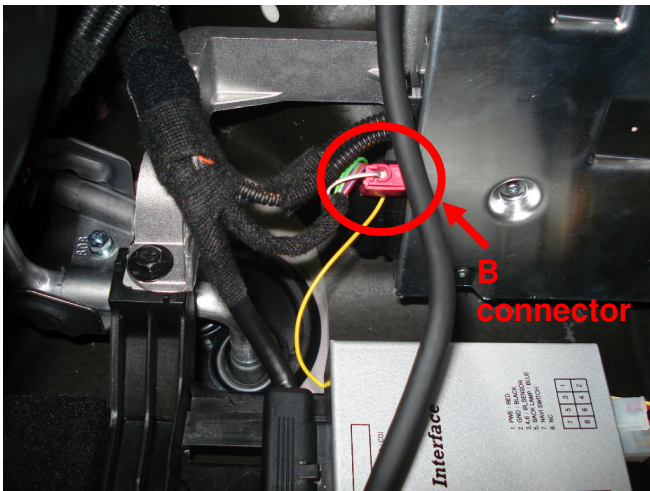

Warning!!

You must complete the installation for
interface, and then the LAST STEP is
to re-plug the MMI power cable (B
connector) to the MMI control module.



After completing the installation, simply press the factory NAV button, then you can switch through the A/V sources you connected and indulge yourself in the hi-fidelity multimedia world!